

SternbergLighting

ESTABLISHED 1923 / EMPLOYEE OWNED

555 Lawrence Avenue | Roselle, IL 60172 | p 847.588.3400 | www.sternberglighting.com

CONCEPTUAL ASSEMBLY DRAWING, SUBJECT TO ENGINEERING VERIFICATION BY THE FACTORY

ARM NUMBER OF ARMS: 1

Number of Arms: One Arm (1)

ARM ARM FIXTURE: SL630

The Solana® medium sized Arm Mount Luminaire has a stylish design that is perfect accent for urban settings. The subtle, yet sophisticated look enhances the impact of any project. The Solana's wide array of optics, lenses and distributions makes this an easy choice for a variety of commercial institutional and municipal projects.

FIXTURE OPTIONS: -12L30T3-MDL018-SV1-RP34

Array: 12 LEDs, 27W for MD_008, 47W for MD_014, 60W for MD_018 (12L)
 Color Temp: 3000K (30)
 Distribution: Type 3 (T3)
 Driver: Multi-Volt Dimmable Low-Range Driver - 120-277V, 180mA (MDL018)
 Lens: Flat Soft Vue Light Diffused Acrylic (SV1)
 Round Pole Adapter: 3" to 4" Pole (RP34)

POLE: 450P4-14.125

The 10-1/2" diameter cast 356 aluminum alloy base and aluminum shaft shall be a one-piece construction. For fixtures using remote ballasts or drivers, the servicing of these components requires pulling the pole. The pole shall be U.L. or E.T.L. listed in U.S. and Canada. All pole heights to have a tolerance of ± 2 "

Model: 450 Lexington (450)
 Shaft Type: Smooth Straight 4 Inch, 6061-T6 Aluminum Alloy (P4) (P4-)
 Height: 14 Ft (14)
 Gauge: .125" (.125)

POLE CAP: PCC

The option tops the Urban pole with a flat cap.

FINISH: /USTD

Assembly shall be powder coated to a yet to be determined Urban finish. This option may be used for quoting purposes when a final decision on the finish specification is pending.

Arms and Accessory	Orientation
Direct Mount	180

(4) 1/2" x 18" Anchor Bolts, 8" Bolt Circle, Diamond pattern

Access Door Orientation: 0°
 Street Side Orientation: 180°

Catalog Number: 1A-SL630-12L30T3-MDL018-SV1-RP34 / 450P4-14.125 / PCC / USTD

Job Name:

Customer Signature:

Drawing #34598

Job Location:

Date:

1 of 2





SternbergLighting

ESTABLISHED 1923 / EMPLOYEE OWNED

555 Lawrence Avenue | Roselle, IL 60172 | p 847.588.3400 | www.sternberglighting.com

CONCEPTUAL ASSEMBLY DRAWING, SUBJECT TO ENGINEERING VERIFICATION BY THE FACTORY

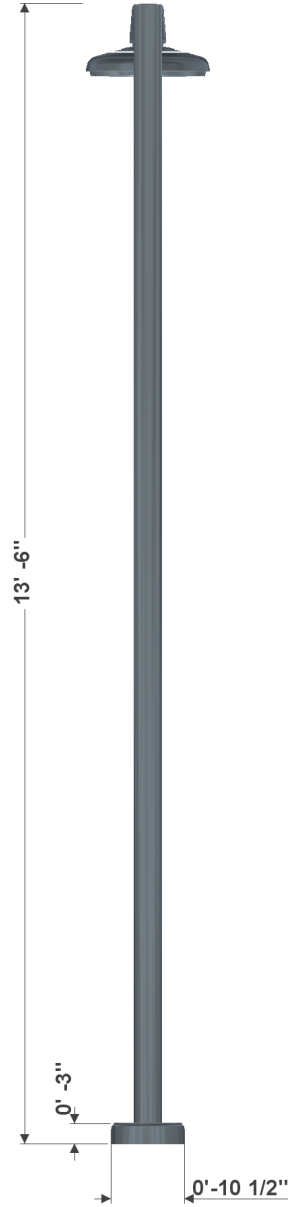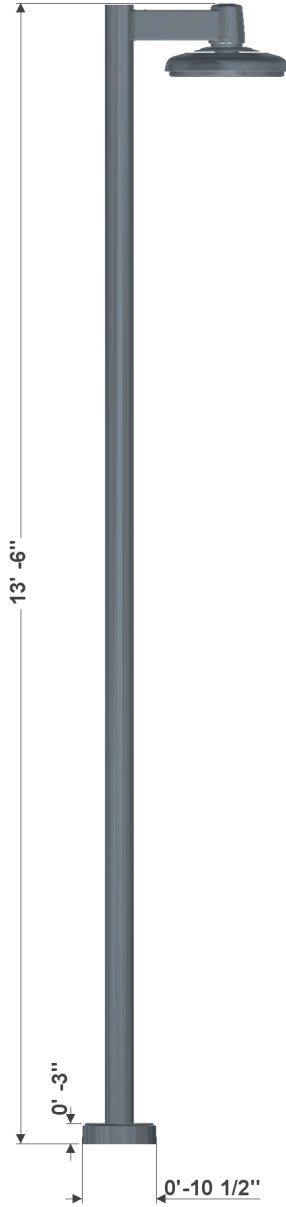

Catalog Number: 1A-SL630-12L30T3-MDL018-SV1-RP34 / 450P4-14.125 / PCC / USTD

Job Name:


Customer Signature:

Drawing #34598

Job Location:

Date:

2 of 2

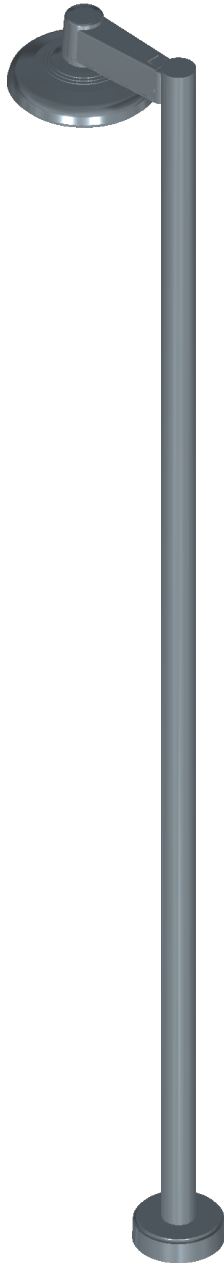

SternbergLighting

ESTABLISHED 1923 / EMPLOYEE OWNED

555 Lawrence Avenue | Roselle, IL 60172 | p 847.588.3400 | www.sternberglighting.com

CONCEPTUAL ASSEMBLY DRAWING, SUBJECT TO ENGINEERING VERIFICATION BY THE FACTORY

ARM NUMBER OF ARMS: 1

Number of Arms: One Arm (1)

ARM ARM FIXTURE: SL630

The Solana® medium sized Arm Mount Luminaire has a stylish design that is perfect accent for urban settings. The subtle, yet sophisticated look enhances the impact of any project. The Solana's wide array of optics, lenses and distributions makes this an easy choice for a variety of commercial institutional and municipal projects.

FIXTURE OPTIONS: -12L30T3-MDL018-SV1-RP34-BLOC

Array: 12 LEDs, 27W for MD_008, 47W for MD_014, 60W for MD_018 (12L)
 Color Temp: 3000K (30)
 Distribution: Type 3 (T3)
 Driver: Multi-Volt Dimmable Low-Range Driver - 120-277V, 180mA (MDL018)
 Lens: Flat Soft Vue Light Diffused Acrylic (SV1)
 Round Pole 3" to 4" Pole (RP34)
 Adapter: Yes (BLOC)
 Houseside Shield or BLOC:

POLE: 450P4-14.125

The 10-1/2" diameter cast 356 aluminum alloy base and aluminum shaft shall be a one-piece construction. For fixtures using remote ballasts or drivers, the servicing of these components requires pulling the pole. The pole shall be U.L. or E.T.L. listed in U.S. and Canada. All pole heights to have a tolerance of $\pm 2"$

Model: 450 Lexington (450)
 Shaft Type: Smooth Straight 4 Inch, 6061-T6 Aluminum Alloy (P4) (P4-)
 Height: 14 Ft (14)
 Gauge: .125" (.125)

POLE CAP: PCC

The option tops the Urban pole with a flat cap.

FINISH: /USTD

Assembly shall be powder coated to a yet to be determined Urban finish. This option may be used for quoting purposes when a final decision on the finish specification is pending.

Arms and Accessory	Orientation
Direct Mount	180

(4) 1/2" x 18" Anchor Bolts, 8" Bolt Circle, Diamond pattern

Access Door Orientation:	0°
Street Side Orientation:	180°

Catalog Number: 1A-SL630-12L30T3-MDL018-SV1-RP34-BLOC / 450P4-14.125 / PCC / USTD

Job Name:

Customer Signature:

Drawing #34597

Job Location:

Date:

1 of 2





SternbergLighting

ESTABLISHED 1923 / EMPLOYEE OWNED

555 Lawrence Avenue | Roselle, IL 60172 | p 847.588.3400 | www.sternberglighting.com

CONCEPTUAL ASSEMBLY DRAWING, SUBJECT TO ENGINEERING VERIFICATION BY THE FACTORY

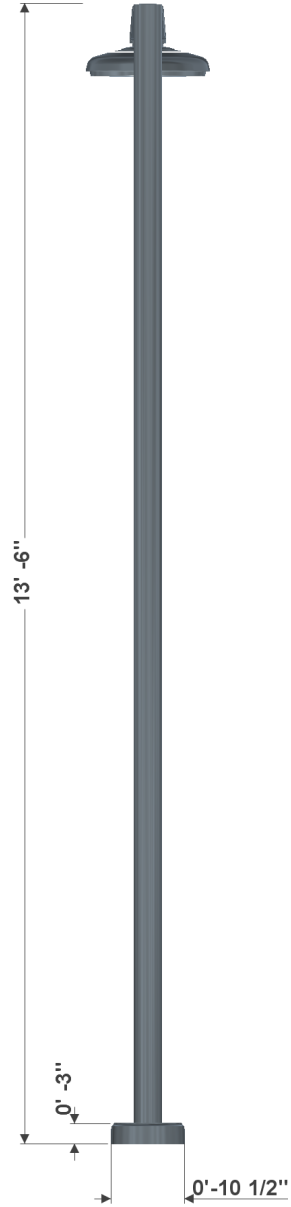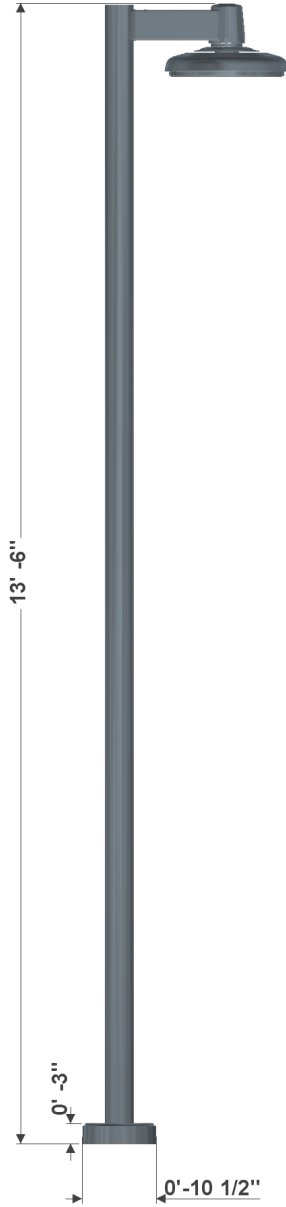

Catalog Number: 1A-SL630-12L30T3-MDL018-SV1-RP34-BLOC / 450P4-14.125 / PCC / USTD

Job Name:


Customer Signature:

Drawing #34597

Job Location:

Date:

2 of 2

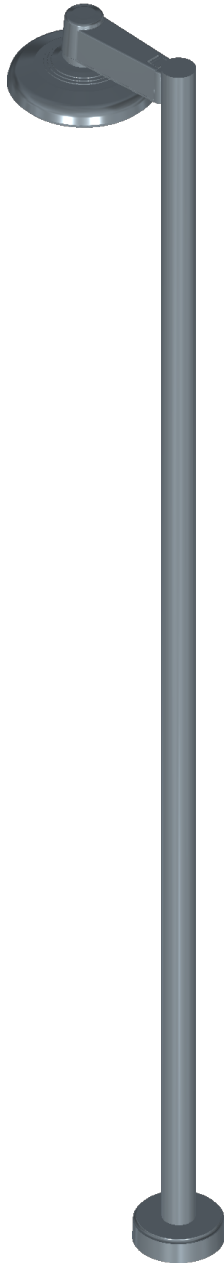

SternbergLighting

ESTABLISHED 1923 / EMPLOYEE OWNED

555 Lawrence Avenue | Roselle, IL 60172 | p 847.588.3400 | www.sternberglighting.com

CONCEPTUAL ASSEMBLY DRAWING, SUBJECT TO ENGINEERING VERIFICATION BY THE FACTORY

ARM NUMBER OF ARMS: 1

Number of Arms: One Arm (1)

ARM ARM FIXTURE: SL630

The Solana® medium sized Arm Mount Luminaire has a stylish design that is perfect accent for urban settings. The subtle, yet sophisticated look enhances the impact of any project. The Solana's wide array of optics, lenses and distributions makes this an easy choice for a variety of commercial institutional and municipal projects.

FIXTURE OPTIONS: -12L30T4-MDL018-SV1-RP34-BLOC

Array: 12 LEDs, 27W for MD_008, 47W for MD_014, 60W for MD_018 (12L)
 Color Temp: 3000K (30)
 Distribution: Type 4 (T4)
 Driver: Multi-Volt Dimmable Low-Range Driver - 120-277V, 180mA (MDL018)
 Lens: Flat Soft Vue Light Diffused Acrylic (SV1)
 Round Pole 3" to 4" Pole (RP34)
 Adapter: Yes (BLOC)
 Houseside Shield or BLOC:

POLE: 450P4-14.125

The 10-1/2" diameter cast 356 aluminum alloy base and aluminum shaft shall be a one-piece construction. For fixtures using remote ballasts or drivers, the servicing of these components requires pulling the pole. The pole shall be U.L. or E.T.L. listed in U.S. and Canada. All pole heights to have a tolerance of $\pm 2"$

Model: 450 Lexington (450)
 Shaft Type: Smooth Straight 4 Inch, 6061-T6 Aluminum Alloy (P4) (P4-)
 Height: 14 Ft (14)
 Gauge: .125" (.125)

POLE CAP: PCC

The option tops the Urban pole with a flat cap.

FINISH: /USTD

Assembly shall be powder coated to a yet to be determined Urban finish. This option may be used for quoting purposes when a final decision on the finish specification is pending.

Arms and Accessory	Orientation
Direct Mount	180

(4) 1/2" x 18" Anchor Bolts, 8" Bolt Circle, Diamond pattern

Access Door Orientation:	0°
Street Side Orientation:	180°

Catalog Number: 1A-SL630-12L30T4-MDL018-SV1-RP34-BLOC / 450P4-14.125 / PCC / USTD

Job Name:

Customer Signature:

Drawing #34599

Job Location:

Date:

1 of 2





SternbergLighting

ESTABLISHED 1923 / EMPLOYEE OWNED

555 Lawrence Avenue | Roselle, IL 60172 | p 847.588.3400 | www.sternberglighting.com

CONCEPTUAL ASSEMBLY DRAWING, SUBJECT TO ENGINEERING VERIFICATION BY THE FACTORY

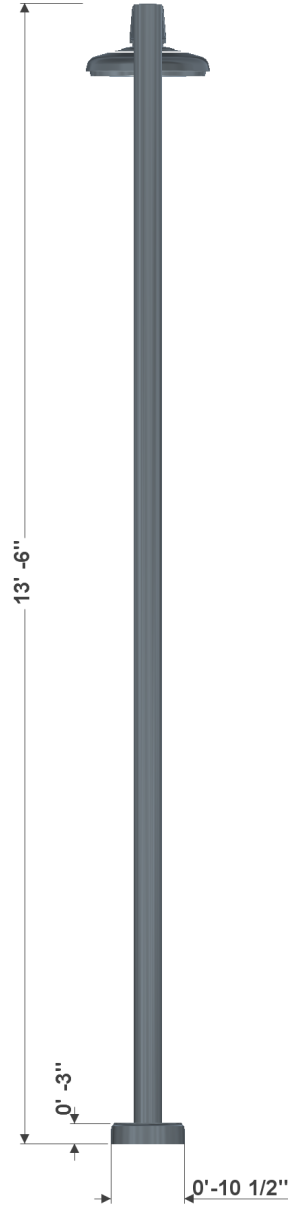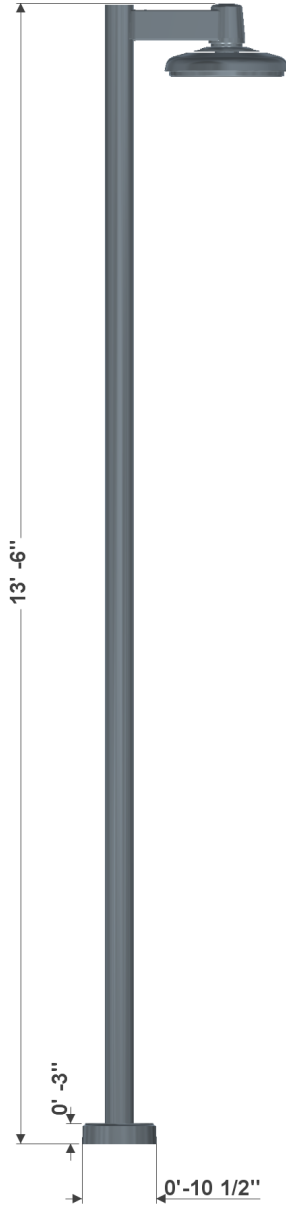

Catalog Number: 1A-SL630-12L30T4-MDL018-SV1-RP34-BLOC / 450P4-14.125 / PCC / USTD

Job Name:


Customer Signature:

Drawing #34599

Job Location:

Date:

2 of 2

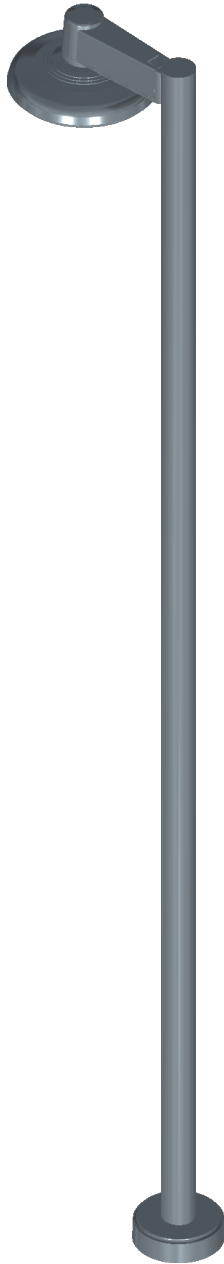

SternbergLighting

ESTABLISHED 1923 / EMPLOYEE OWNED

555 Lawrence Avenue | Roselle, IL 60172 | p 847.588.3400 | www.sternberglighting.com

CONCEPTUAL ASSEMBLY DRAWING, SUBJECT TO ENGINEERING VERIFICATION BY THE FACTORY

ARM NUMBER OF ARMS: 1

Number of Arms: One Arm (1)

ARM ARM FIXTURE: SL630

The Solana® medium sized Arm Mount Luminaire has a stylish design that is perfect accent for urban settings. The subtle, yet sophisticated look enhances the impact of any project. The Solana's wide array of optics, lenses and distributions makes this an easy choice for a variety of commercial institutional and municipal projects.

FIXTURE OPTIONS: -12L30T5-MDL018-SV1-RP34

Array: 12 LEDs, 27W for MD_008, 47W for MD_014, 60W for MD_018 (12L)
 Color Temp: 3000K (30)
 Distribution: Type 5 (T5)
 Driver: Multi-Volt Dimmable Low-Range Driver - 120-277V, 180mA (MDL018)
 Lens: Flat Soft Vue Light Diffused Acrylic (SV1)
 Round Pole Adapter: 3" to 4" Pole (RP34)

POLE: 450P4-14.125

The 10-1/2" diameter cast 356 aluminum alloy base and aluminum shaft shall be a one-piece construction. For fixtures using remote ballasts or drivers, the servicing of these components requires pulling the pole. The pole shall be U.L. or E.T.L. listed in U.S. and Canada. All pole heights to have a tolerance of $\pm 2"$

Model: 450 Lexington (450)
 Shaft Type: Smooth Straight 4 Inch, 6061-T6 Aluminum Alloy (P4) (P4-)
 Height: 14 Ft (14)
 Gauge: .125" (.125)

POLE CAP: PCC

The option tops the Urban pole with a flat cap.

FINISH: /USTD

Assembly shall be powder coated to a yet to be determined Urban finish. This option may be used for quoting purposes when a final decision on the finish specification is pending.

Arms and Accessory	Orientation
Direct Mount	180

(4) 1/2" x 18" Anchor Bolts, 8" Bolt Circle, Diamond pattern

Access Door Orientation: 0°
 Street Side Orientation: 180°

Catalog Number: 1A-SL630-12L30T5-MDL018-SV1-RP34 / 450P4-14.125 / PCC / USTD

Job Name:

Customer Signature:

Drawing #34600

Job Location:

Date:

1 of 2





SternbergLighting

ESTABLISHED 1923 / EMPLOYEE OWNED

555 Lawrence Avenue | Roselle, IL 60172 | p 847.588.3400 | www.sternberglighting.com

CONCEPTUAL ASSEMBLY DRAWING, SUBJECT TO ENGINEERING VERIFICATION BY THE FACTORY

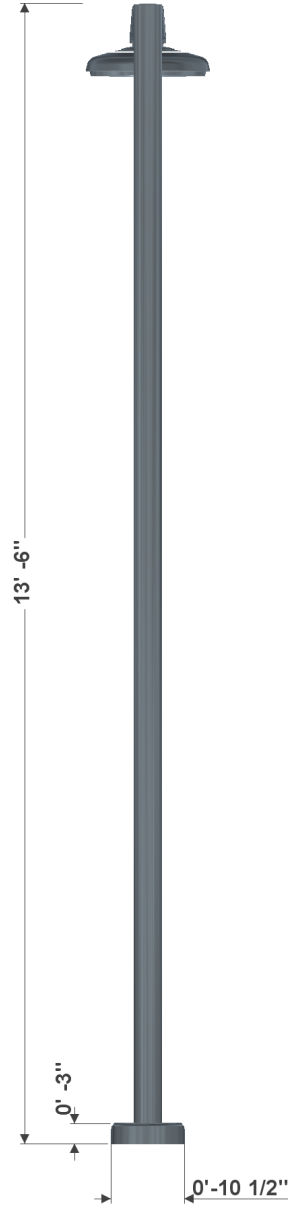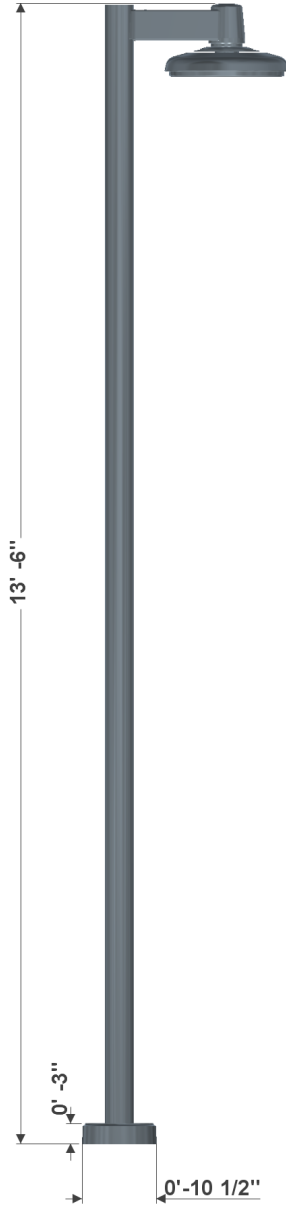

Catalog Number: 1A-SL630-12L30T5-MDL018-SV1-RP34 / 450P4-14.125 / PCC / USTD

Job Name:

Customer Signature:

Drawing #34600

Job Location:

Date:

2 of 2